
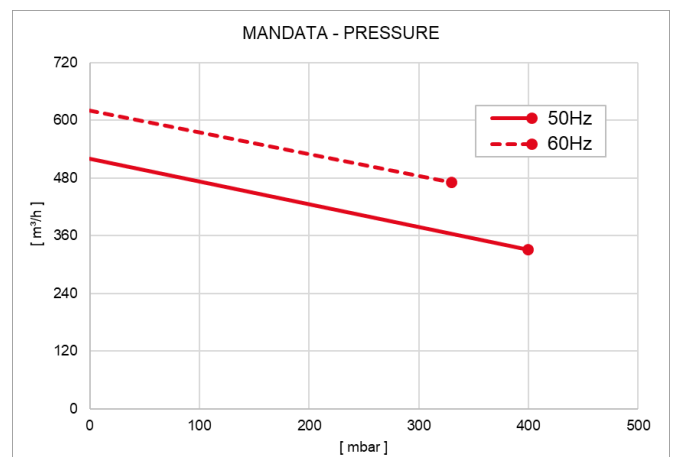


| Modello - Model | | TDL 550 | |
|--|--|----------------------|----------------------|
| | | 50Hz | 60Hz |
| Codice catalogo - Catalogue code | | 9413015 | |
| Potenza motore - Motor power (3~) kW | | 7.5 | 8.6 |
| IE3 | Alimentazione - Power supply V±10% (Δ / Y) | 400 / 690 | 460 / 795 |
| | Efficienza - Efficiency % | 90.1 | 90.2 |
| Alimentazione - Power supply V±5% (Δ / Y) | | 345-415 / 600-720 | 380-480 / 660-830 |
| Assorbimento - Absorption A (Δ / Y) | | 18.4-15.3 / 10.6-8.8 | 20.9-16.6 / 11.1-9.6 |
| Portata - Flow rate m³/h | | 520 | 620 |
| Vuoto - Vacuum mbar | | -400 | -360 |
| Sovrappressione - Pressure mbar | | +400 | +330 |
| Rumorosità - Noise level (UNI EN ISO 2151 - K 3dB) dB(A) | | 74 | 78 |
| Peso - Weight kg [N] | | 86 [646.8] | |

Subject to change without prior notice

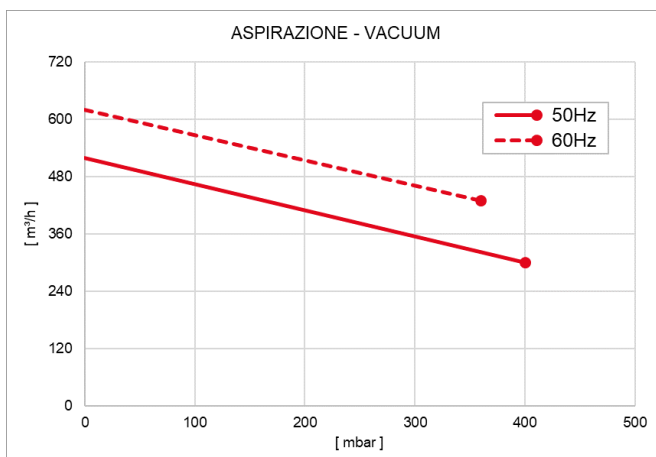

Curve riferite alla pressione di 1013mbar (Ass.) e temperatura 20°C (tolleranza ±10%)
 Curves refer to 1013mbar (Abs.) pression and 20°C temperature (tolerance ±10%)